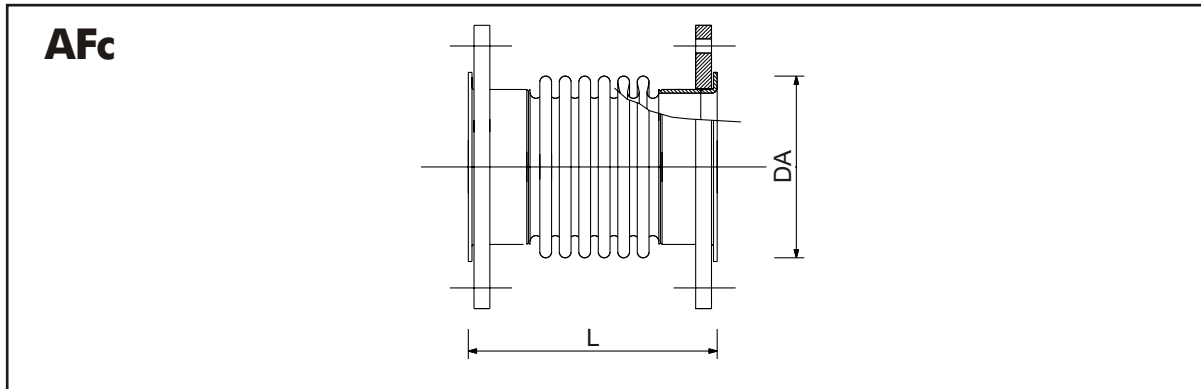


MATERIALI STANDARD
Soffietto: ASTM A240 type321/type316

Terminali: ASTM A106 gr.B - ASTM A312 type304/type316 - ASTM A240 type304/type316

Flange: ASTM A105

Cartelle: ASTM A240 type304/type316


DN	PN	Corsa assiale			I (±)	Resistenza propria per ogni ± 1 mm di corsa		DA	Sezione efficace [cm ²]	Tipo AFc L
		V (+)	H (-)	V+H		assiale FA	laterale FL			
		[mm]	[mm]	[mm]	[mm]	[Kg/mm]	[Kg/mm]	[mm]		[mm]
32	16	7	14	21	4	18	12	51	15	150
	25	7	14	21	4	18	12	51	15	150
40	16	8	16	24	4	17	13	56	18	150
	25	8	16	24	4	17	13	56	18	150
50	16	12	23	30	4	25	20	71	34	170
	25	12	23	30	4	25	20	71	34	170
65	16	13	27	40	4	23	20	90	48	190
	25	13	27	40	4	23	20	90	48	190
80	16	13	27	40	4	25	22	104	66	210
	25	13	27	40	4	25	22	104	66	210
100	16	13	27	40	4	35	51	129	108	215
	25	13	27	40	4	35	51	129	108	215
125	16	15	30	45	5	34	53	158	162	240
	25	15	30	45	5	34	53	158	162	240
150	16	15	30	45	5	26	64	184	224	240
	25	15	30	45	5	26	64	184	224	240
200	16	17	33	50	5	30	99	238	385	250
	25	17	33	50	5	30	99	238	385	250